

ASSESSORIES



EBW 64

Art. no. 601139
Interface converter

General:	
For connection of max. 64 EASYBus-modules to the RS232-interface of your PC.	
Specifications:	
Voltage supply:	230 V AC / 50 Hz
Power consumption:	approx. 15 W
Max. permissible sensor modules:	64 (depending on type of the used sensor modules)
Permissible cable length:	1000 m (depending on type of cable and wiring)
Baud rate:	4800 Baud
Serial connection:	RS232
Electrical isolated:	yes
Overload display:	yes
Short-circuit proof:	yes (passiv)
Operating temperature:	0 ... 50 °C
Humidity:	20 ... 80 % RH, non-condensing
Storage temperature:	-20 ... +70 °C
Dimensions:	100 x 75 x 110 mm (H x W x D)
Bit-Recovery	yes
Scope of supply:	interface converter, 9-pin Dsub extension cable



EBW 250

Art. no. 609308
Interface converter

General:	
For connection of up to 250 sensor modules via RS232, USB or network. For use as a repeater in an existing EASYBus system.	
Specifications:	
Voltage supply:	110 ... 250 V AC
Power consumption:	max. 100 W
Max. permissible sensor modules:	250 (depending on type of the used sensor modules)
Permissible cable length:	1000 m (depending on type of cable and wiring)
Baud rate:	300 ... 38400 Baud
Serial connection:	RS 232, USB, network, EASYBus input (repeater function)
Electrical isolated:	yes
Overload display:	yes
Short-circuit proof:	yes (aktiv)
Operating temperature:	0 ... 45 °C
Humidity:	30 ... 80 % RH
Storage temperature:	-20 ... +70 °C
Dimensions:	229 x 204 x 76 (H x W x D)
Bit-Recovery	yes
Scope of supply:	Interface converter, driver CD, manual

Assesories:

USB-Adapter

Art. no. 601109
for connection of an interface converter to the USB-interface of your PC




GWH 40K

Art. no. 601166
Wall suspension with lock as protection against theft suitable for all EASYLog (except EASYLog 40NS W), EBN/K - ..., GIA 0420 WK and GRA 0420 WK

GWH 10

Art. no. 601169
simple wall suspension, made of stainless steel, suitable for all EASYLog (except EASYLog 40NS W).

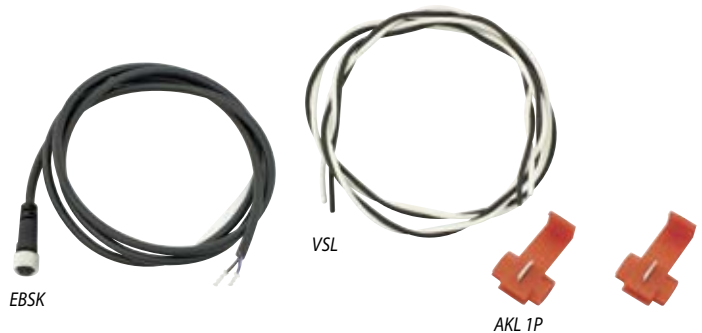

EBSK 01

Art. no. 601173
Special plug with approx. 1 m of cable for connection of one EASYLog, to the EASYBus

EBSK 03

Art. no. 601175
Special plug with approx. 3 m of cable for connection of one EASYLog, to the EASYBus

EBSK 10

Art. no. 601176
Special plug with approx. 10 m of cable for connection of one EASYLog, to the EASYBus (Note: the EASYLOG will be supplied without connection cable. The GSOFT40K includes a connection cable EBSK01. Please order EBSK01, EBSK03 resp. EBSK10 as required in case of permanent bus connection!)

VSL 2P

Art. no. 601178
Twisted special cable for EASYBus-system, cross section 2 x 0.75 mm²

AKL 1P

Art. no. 601185
Special branch terminal for connection to VSL 2P, 2 pieces

GSM-3000

Art. no. 607638
Alarm device



General:	
Sending SMS when alarms occur. Connectivity.g. for EB 3000, the GIA 20 EB or other devices with relay output or NPN switching output.	
Specifications:	
LCD-Display:	with text display
Inputs:	6
Outputs:	4
Miscellaneous:	SMS or call for up to 9 phone numbers Emergency battery SMS at power failure
Scope of supply:	GSM alarm device, antenna for screw on SMA connector, fastening material, 9V battery, power supply, manual, connection instructions

HANDHELD INSTRUMENT

DISPLAY/CONTROLLER

LOGGER- / BUS SYSTEMS

TRANSMITTER

TEMPERATURE PROBE

ALARM/PROTECTION, LEVEL